


Termination

Power Port 10MG Quick Installation Note

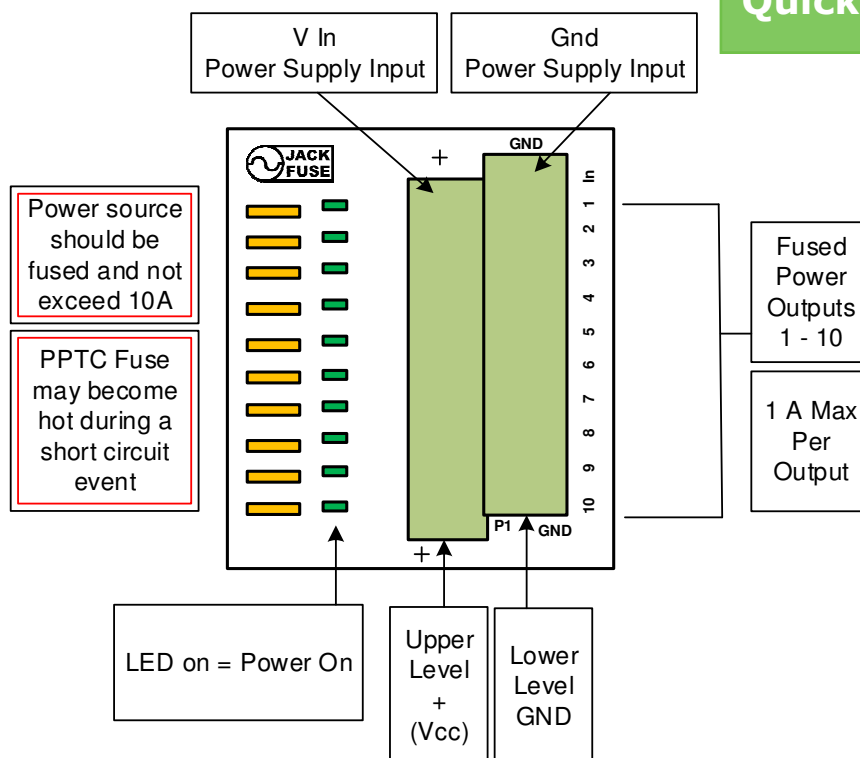

Mounting

Supplied clips suit most DIN rail types.

Re-settable Fuses

The output fuse(s) will trip in an over-current situation and re-set when the current fault has cleared and the fuse cooled. (Typically, <1 second). Note that exact trip & re-set requirements are subject to variables such as voltage and temperature. Contact Jack Fuse for de-rating information. Beware that the fuses will become hot when tripped. Always avoid touching the fuses when the PP10HD is powered.

Technical Data

Input voltage	5 to 24 VDC (power supply should have master fuse)
Number of outputs	10
Max current per output	1A
Fuse I-hold	1.1A (PTC fuse @ 20 degrees C)
Fuse I-trip	2.2A (PTC fuse @ 20 degrees C)
Max current total	10A
Max wire conductor size	3.3mm ² (12 AWG)
Dimensions (with mounting clips)	75 L X 55 W X 55 H (mm)

More Information: For complete install notes, data sheets and technical support please visit www.jackfuse.com

Become a **Jack Fuse Product and Power Certified Technician**. Free training available online.



Authorised, valued-added distributor

Australia & New Zealand



Powerbox Australia Pty Ltd

Sydney Head Office
4 Beaumont Road,
Mt Kuring-Gai, NSW 2080
Australia



1800 251 380



sales@powerbox.com.au



powerbox.com.au

Powerbox Pacific Ltd

New Zealand Sales Office
1a Henry Rose Place,
Albany, Auckland
New Zealand 0632



09 4158 320



sales@powerbox.co.nz



powerbox.co.nz