



CQB100W-110S CMFC(D) SERIES 100 WATT 4:1 INPUT ISOLATED DC-DC CONVERTERS

Features

- Efficiency Up to 91%
- Fixed Switching Frequency
- Regulated Outputs
- Remote On/Off
- Low No Load Power Consumption
- Fully Protected (OTP/OCP/OVP/UVLO)
- 3000Vdc I/O Isolation
- Operating Case Temperature -40 to +100°C
- UL 60950-1 2nd (Basic Insulation) Approval for DC Modules
- EN 50155 for EMC, Environmental and Characteristic
- Shock & Vibration (EN 61373) Compliant
- Fire & Smoke EN 45545-2 Compliant
- Safety Meets IEC/EN/UL 62368-1
- Build-In EMI Filter
- Chassis Mount, Baseplate Cooled



| MODEL NUMBER | INPUT VOLTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | | INPUT CURRENT | | % EFF. | CAPACITOR LOAD MAX. |
|--|---------------|----------------|----------------|-------|---------------|-----------|--------|---------------------|
| | | | MIN. | MAX. | NO LOAD | FULL LOAD | | |
| CQB100W-110S05□-CMFC CQB100W-110S05□-CMFD | 43-160 VDC | 5 VDC | 0 mA | 20 A | 15 mA | 1030 mA | 89 | 20000uF |
| CQB100W-110S12□-CMFC CQB100W-110S12□-CMFD | 43-160 VDC | 12 VDC | 0 mA | 8.4 A | 15 mA | 1010 mA | 91 | 8400uF |
| CQB100W-110S15□-CMFC CQB100W-110S15□-CMFD | 43-160 VDC | 15 VDC | 0 mA | 6.7 A | 15 mA | 1010 mA | 91 | 6700uF |
| CQB100W-110S24□-CMFC CQB100W-110S24□-CMFD | 43-160 VDC | 24 VDC | 0 mA | 4.2 A | 15 mA | 1040 mA | 88 | 4200μF |
| CQB100W-110S28□-CMFC CQB100W-110S28□-CMFD | 43-160 VDC | 28 VDC | 0 mA | 3.6 A | 15 mA | 1040 mA | 88 | 3600μF |
| CQB100W-110S48□-CMFC CQB100W-110S48□-CMFD | 43-160 VDC | 48 VDC | 0 mA | 2.1 A | 15 mA | 1020 mA | 89.5 | 1000μF |

NOTE:

1. Nominal Input Voltage 110 VDC
2. □ = N or none
3. VR1 is Used for Output Voltage Adjustment.
4. Refer to Application Note for Thermal Resistance and Derating Information.
5. TVS is Included for Input Surge Voltage Protection.
6. Recommend an External Fuse for Input Reverse Polarity Protection (Shunt Diode is Included Inside).
7. Output connector CN3 wafer with TAIWAN KING PIN TERMINAL P110I series and mate with JST housing PH series or equivalent.
8. CN1&CN2 connector: DINKLE EK500V-04P series or equivalent, suitable electric wire 24~12AWG (IEC 0.5~2.5mm²)

PART NUMBER

| Series | Nominal Input Voltage | Number of Outputs | Nominal Output Voltage | Remote On/Off Logic | Chassis Mount Type | | Heatsink |
|----------|-----------------------|-------------------|---|---------------------------------|---|--|---|
| CQB100W- | II | O | XX | L | -YYY | Z | +WW |
| CQB100W | 110 : 110VDC | S : Single | 05 : 5VDC 12 : 12VDC 15 : 15VDC 24 : 24VDC 28 : 28VDC 48 : 48VDC | None : Positive N : Negative | Chassis CMF : Mount Built in Filter | C : Open Frame D : With Cover | None : Blank HS : Heatsink HD : Heatsink+ Din Rail |

Part Number Example:

CQB100W-110S12N-CMFC: Chassis Mount, 100W, 4:1 43-160Vdc Input, Single 12Vdc Output, Negative Logic, Open Frame



CQB100W-110S CMFC(D) Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|----------------------------|----------------------------------|--------|------|------|------|-----------------|
| Input Voltage | Continuous | All | -0.3 | | 160 | V _{dc} |
| Input Surge Voltage | 100ms max. | All | | | 200 | V _{dc} |
| Operating Case Temperature | At the center part of base plate | All | -40 | | 100 | °C |
| Storage Temperature | | All | -40 | | 105 | °C |

INPUT CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|-----------------------------|---|------------------------|------|------|------|-----------------|
| Operating Input Voltage | | All | 43 | 110 | 160 | V _{dc} |
| Input Under Voltage Lockout | | | | | | |
| Turn-On Voltage Threshold | Full load | All | 40.5 | 41.5 | 42.5 | V _{dc} |
| Turn-Off Voltage Threshold | Full load | All | 37.5 | 38.5 | 39.5 | V _{dc} |
| Lockout Hysteresis Voltage | Full load | All | | 3 | | V _{dc} |
| Maximum Input Current | V _{in} =43V, Full load | All | | 2.6 | | A |
| No-Load Input Current | V _{in} =110V, I _o =0A | See Model Number Table | | | | mA |

OUTPUT CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|--|--|------------------------|---------------------------|------|--------------|-------|
| Voltage Set Point Accuracy | V _{in} =110V, Full load, T _c =25°C | All | -1.0 | | +1.0 | % |
| Output Voltage Regulation | | | | | | |
| Load Regulation | Full load to no load | 05Vo Others | | | ±0.5 ±0.2 | % |
| Line Regulation | V _{in} =High line to low line, full load | All | | | ±0.2 | % |
| Temperature Coefficient | T _c =-40°C to 105°C | All | | | ±0.02 | %/°C |
| Output Voltage Ripple and Noise (5Hz to 20MHz Bandwidth) | | | | | | |
| Peak-to-Peak | Full load, 1uF ceramic capacitors | 5Vo | | | 100 | mV |
| | | 12Vo | | | 100 | |
| | | 15Vo | | | 100 | |
| | | 24Vo | | | 200 | |
| | | 28Vo | | | 200 | |
| | | 48Vo | | | 300 | |
| RMS. | | 05Vo | | | 40 | mV |
| | | 12Vo | | | 40 | |
| | | 15Vo | | | 40 | |
| | | 24Vo | | | 100 | |
| | | 28Vo | | | 100 | |
| | | 48Vo | | | 150 | |
| Output Current Range | V _{in} = 43 to 160V | See Model Number Table | | | | A |
| Over Current Protection | Hiccup mode. Auto recovery | All | 110 | 125 | 160 | % |
| Short Circuit Protection | | All | Continuous, Auto Recovery | | | |
| External Load Capacitance | Full load (resistive) | See Model Number Table | | | | uF |
| Output Voltage Trim Range | P _o ≤ max. rated power, I _o ≤ I _{o,max.} | 15Vo Others | -20 -10 | | +10 +10 | % |
| Output Voltage Remote Sense Range | P _o ≤ max. rated power, I _o ≤ I _{o,max.} % of nominal V _o | All | | | +10 | % |
| Over Voltage Protection | Limited voltage, % of nominal V _o | All | 115 | 125 | 140 | % |



CQB100W-110S CMFC(D) Series

EFFICIENCY

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|-----------|----------------------|------------------------|------|------|------|-------|
| 100% Load | $V_{in}=110V$ | See Model Number Table | | | | % |

DYNAMIC CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---|---|--------|------|------|---------|---------|
| Output Voltage Current Transient | | | | | | |
| Error Band | 75% to 100% of I_{o_max} . Step load change $di/dt=0.1A/\mu s$ (within 1% V_{out} nominal) | All | | | ± 5 | % |
| Recovery Time | | All | | | 250 | μs |
| Turn-On Delay and Rise Time | | | | | | |
| Full load (Constant resistive load) | | | | | | |
| Turn-On Delay Time, From On/Off Control | $V_{on/off}$ to 10% V_{o_set} , Remote on | All | | 50 | | ms |
| Turn-On Delay Time, From Input | $V_{in_min.}$ to 10% V_{o_set} , Power up | All | | 50 | | ms |
| Output Voltage Rise Time | 10% V_{o_set} to 90% V_{o_set} | All | | 50 | | ms |

ISOLATION CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|--|---------------------------------------|--------|------|-------|------|-----------|
| Isolation Voltage (100% factory Hi-Pot tested @2sec.) | 1 Minute; input to output | All | | | 3000 | V_{dc} |
| | 1 Minute; input to case (base plate) | | | | 2250 | V_{dc} |
| | 1 Minute; output to case (base plate) | | | | 500 | V_{ac} |
| Isolation Resistance | Input to output | All | 100 | | | $M\Omega$ |
| Isolation Capacitance | Input to output | 05Vo | | 1500 | | pF |
| | | 12Vo | | 1500 | | |
| | | 15Vo | | 1500 | | |
| | | 24Vo | | 1500 | | |
| | | 28Vo | | 1500 | | |
| | | 48Vo | | 1500 | | |
| | Input to case (base plate) | 05Vo | | 4600 | | |
| | | 12Vo | | 7680 | | |
| | | 15Vo | | 4580 | | |
| | | 24Vo | | 4800 | | |
| | | 28Vo | | 6040 | | |
| | | 48Vo | | 5820 | | |
| | Output to Case (base plate) | 05Vo | | 2670 | | |
| | | 12Vo | | 15500 | | |
| | | 15Vo | | 19400 | | |
| | | 24Vo | | 6700 | | |
| | | 28Vo | | 6200 | | |
| | | 48Vo | | 10200 | | |

FEATURE CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---|--|--------|---------------------|------|------|-------|
| Switching Frequency | Pulse width modulation (PWM), fixed | All | 270 | 300 | 330 | KHz |
| On/Off Control, Positive Remote On/Off Logic, Refer to -Vin Pin | | | | | | |
| Logic Low (Module Off) | $V_{on/off}$ at $I_{on/off}=0.0\mu A$, Pin open=off | All | 0 | | 1.2 | V |
| Logic High (Module On) | $V_{on/off}$ at $I_{on/off}=1.0mA$ | All | 3.5 or Open Circuit | | 160 | V |



CQB100W-110S CMFC(D) Series

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---|--|--------|---------------------|------|------|-------|
| On/Off Control, Negative Remote On/Off Logic, Refer to -Vin Pin | | | | | | |
| Logic High (Module Off) | $V_{on/off}$ at $I_{on/off}=1.0mA$ | All | 3.5 or Open Circuit | | 160 | V |
| Logic Low (Module On) | $V_{on/off}$ at $I_{on/off}=0.0uA$, Pin open=on | All | 0 | | 1.2 | V |
| On/Off Current (for Both Remote On/Off Logic) | $I_{on/off}$ at $V_{on/off}=0.0V$ | All | | 0.3 | 1 | mA |
| Off Converter Input Current | Shutdown input idle current | All | | 5 | 10 | mA |
| Over Temperature Shutdown | Temperature at the center part of base plate, non-latching (DC module) | All | | 105 | | °C |
| Over Temperature Recovery | | All | | 100 | | °C |

GENERAL SPECIFICATIONS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typ. | Max. | Units |
|---------------------------------|--|----------|------|------|------|------------------|
| MTBF | $I_o=100\%$ of $I_{o_max.}$; MIL-HDBK - 217F_Notice 1, GB, 25°C | 05Vo | | 514 | | K hours |
| | | 12Vo | | 552 | | |
| | | 15Vo | | 611 | | |
| | | 24Vo | | 728 | | |
| | | 28Vo | | 618 | | |
| | | 48Vo | | 750 | | |
| Weight | | -CMFC | | 222 | | grams |
| | | -CMFD | | 246 | | |
| | | -CMFD+HS | | 487 | | |
| | | -CMFD+HD | | 504 | | |
| Base plate Material | Aluminum | | | | | |
| Potting Material | UL 94V-0 (DC Module) | | | | | |
| Shock/Vibration | EN 50155 (EN 61373) Compliant | | | | | |
| Humidity | 95% RH max. Non condensing | | | | | |
| Altitude | 3000m Operating altitude, 12000m Transport altitude | | | | | |
| Thermal Shock | MIL-STD-810F | | | | | |
| Fire & Smoke | EN 45545-2 Compliant | | | | | |
| EMI | EN 50155 Compliant (external filter required for EN 50121-3-2) | | | | | Class A |
| ESD | EN 61000-4-2 Level 3: Air $\pm 8kV$, Contact $\pm 6kV$ | | | | | Perf. Criteria A |
| Radiated Immunity | EN 61000-4-3 Level 3: 80~1000MHz, 20V/m | | | | | Perf. Criteria A |
| Fast Transient | EN 61000-4-4 Level 3: On power input port, $\pm 2kV$ | | | | | Perf. Criteria A |
| Surge | EN 61000-4-5 Level 4: Line to earth, $\pm 4kV$, Line to line, $\pm 2kV$ | | | | | Perf. Criteria A |
| Conducted Immunity | EN 61000-4-6 Level 3: 0.15~80MHz, 10V | | | | | Perf. Criteria A |
| Interruptions of Voltage Supply | EN 50155 Class S2: 10ms interruptions, with external hold up circuit and capacitor required | | | | | Perf. Criteria A |
| Supply Change Over | EN 50155 Class C2: During a supply break of 30ms, with external hold up circuit and capacitor required | | | | | Perf. Criteria B |
| Application Note Link | CQB100W-110S CMFC(D) Series App Notes | | | | | |
| Packaging Information Link | Packaging Information | | | | | |



CQB100W-110S CMFC(D) Series

Immunity to Environmental Conditions.

| Phenomenon | Reference Clause(s) | Reference Standard | Test Conditions | Result |
|---|---------------------|--------------------|--|--------|
| Low Temperature Start-up test | 13.4.4 | EN 60068-2-1 | Class OT6 Temperature: -40°C Duration: 2 hrs | Pass |
| Dry Heat Test | 13.4.5 | EN 60068-2-2 | Class OT6 & ST0 Temperature: 85°C Duration: 6 hrs | Pass |
| Low Temperature Storage Test | 13.4.6 | EN 60068-2-1 | Temperature: -40°C Duration: 16 hrs | Pass |
| Cyclic Damp Heat Test | 13.4.7 | EN 60068-2-30 | Temperature: 25°C - 55°C Humidity: 90% RH Duration: 48 hrs | Pass |
| Random Vibration Test | 13.4.11 | EN 61373 | Temperature: 25°C±10°C Humidity: 50% ±25% RH Frequency range: 5 ~ 150 Hz Vertical: 1.01 m/s^2 Transverse: 0.450 m/s^2 Longitudinal: 0.700 m/s^2 Duration: 10 min / axis | Pass |
| Simulated Long Life Test at Increased Random Vibration Levels | 13.4.11 | EN 61373 | Temperature: 25°C±10°C Humidity: 50% ±25% RH Frequency range: 5 ~ 150 Hz Vertical: 5.72 m/s^2 Transverse: 2.55 m/s^2 Longitudinal: 3.96 m/s^2 Duration: 5 hrs / axis | Pass |
| Shock Test | 13.4.11 | EN 61373 | Temperature: 25°C±10°C Humidity: 50% ±25% RH Frequency range: 5 ~ 150 Hz ±Vertical: 30 m/s^2 ±Transverse: 30 m/s^2 ±Longitudinal: 50 m/s^2 Duration: 30ms x18 (Each axis 3 shocks) | Pass |

EN 45545-2 Fire & Smoke Test Conditions.

| Item | | Standard | Hazard Level |
|------|---------------------|--|---------------|
| R22 | Oxygen Index Test | EN 45545-2: 2013 EN ISO 4589-2: 2006 | HL1, HL2, HL3 |
| | Smoke Density Test | EN 45545-2: 2013 EN ISO 5659-2: 2013 | HL1, HL2, HL3 |
| | Smoke Toxicity Test | EN 45545-2: 2013 NF X70-100: 2006 | HL1, HL2, HL3 |
| R23 | Oxygen Index Test | EN 45545-2: 2013 EN ISO 4589-2: 2006 | HL1, HL2, HL3 |
| | Smoke Density Test | EN 45545-2: 2013 EN ISO 5659-2: 2013 | HL1, HL2, HL3 |
| | Smoke Toxicity Test | EN 45545-2: 2013 NF X70-100: 2006 | HL1, HL2, HL3 |
| R24 | Oxygen Index Test | EN 45545-2: 2013 EN ISO 4589-2 | HL1, HL2, HL3 |
| R25 | Glow - Wire Test | EN 45545-2:2013 EN 60695-2-11:2001 | HL1, HL2, HL3 |
| R26 | Vertical Flame Test | EN 45545-2: 2013 EN 60695-11-10: 2013 | HL1, HL2, HL3 |




CQB100W-110S CMFC(D) Series


CHARACTERISTIC CURVE

Power Derating Curve


CQB100W-110S CMFC(D) Derating Curve with Heat Sink FBL254 (Vin=110V)

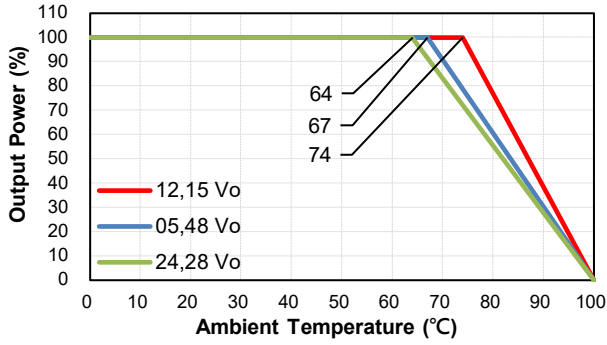

CQB100W-110S CMFD+HS(HD) Derating Curve (Vin=110V)

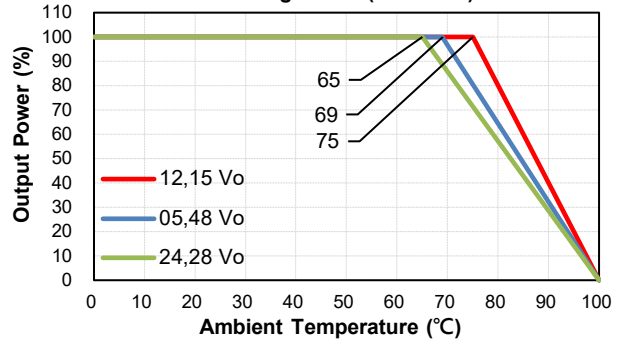


CQB100W-110S CMFC(D) Derating Curve with Iron Plate 17x17x0.04 inch (Vin=110V)

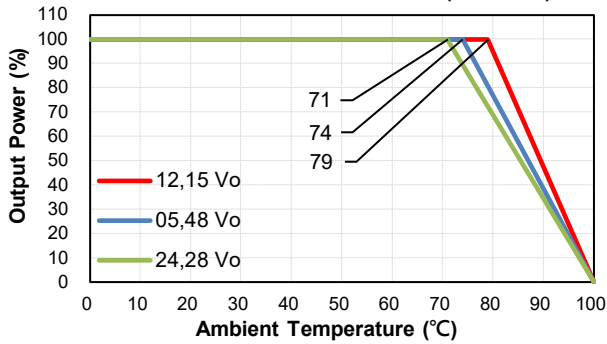


Performance Data

CQB100W-110S05-CMFC Eff Vs Io @25 Deg. C

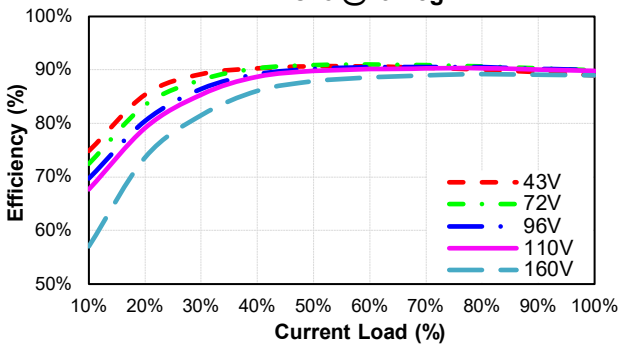


CQB100W-110S05-CMFC Pd Vs Po @25 Deg. C

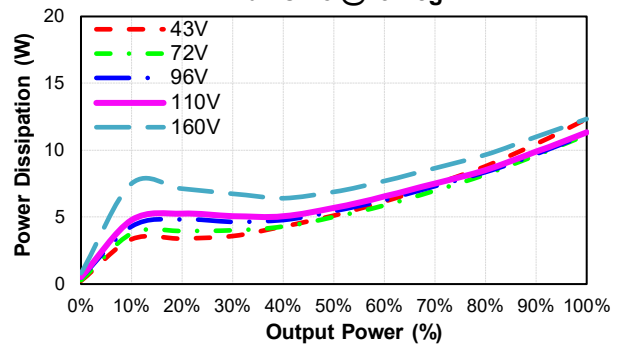




CQB100W-110S CMFC(D) Series


CQB100W-110S12-CMFC
Eff Vs Io @25 Deg. C

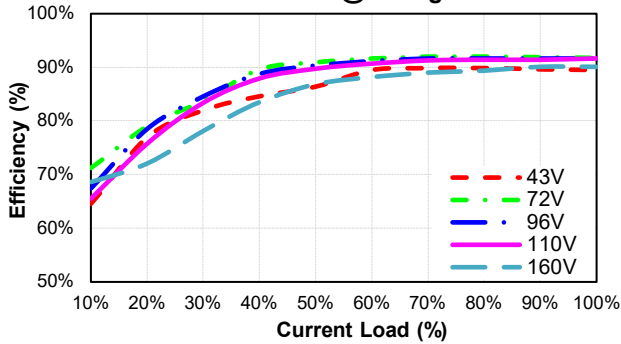


CQB100W-110S12-CMFC
Pd Vs Po @25 Deg. C

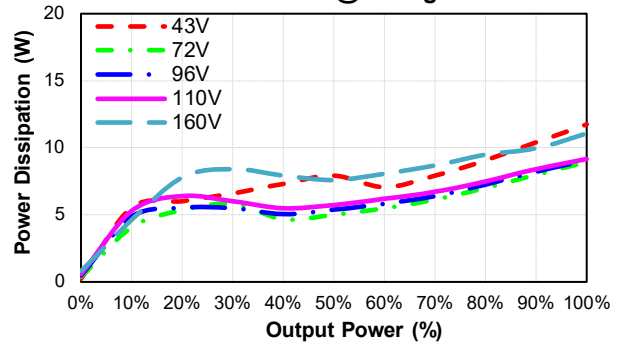


CQB100W-110S15-CMFC
Eff Vs Io @25 Deg. C

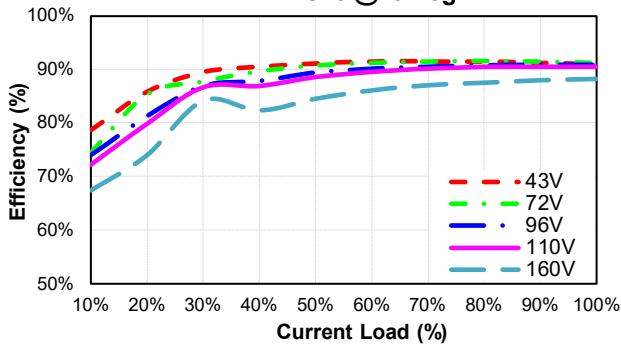


CQB100W-110S15-CMFC
Pd Vs Po @25 Deg. C

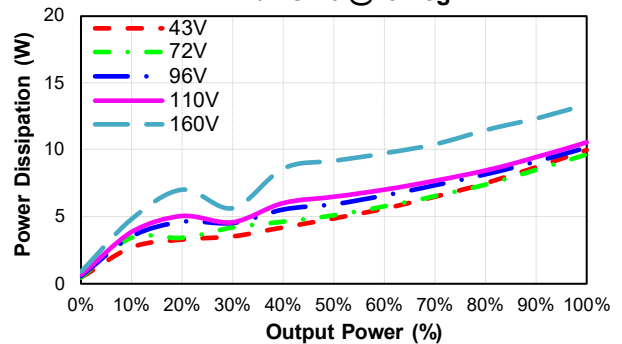


CQB100W-110S24-CMFC
Eff Vs Io @25 Deg. C

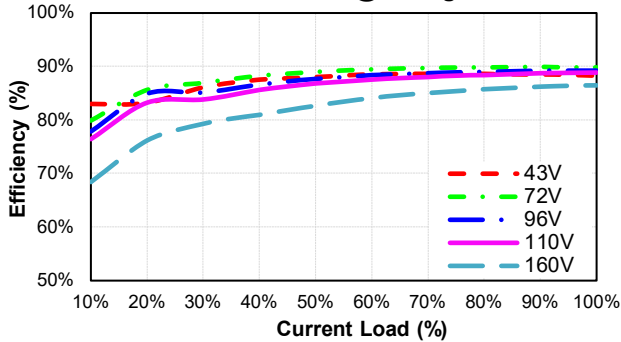


CQB100W-110S24-CMFC
Pd Vs Po @25 Deg. C

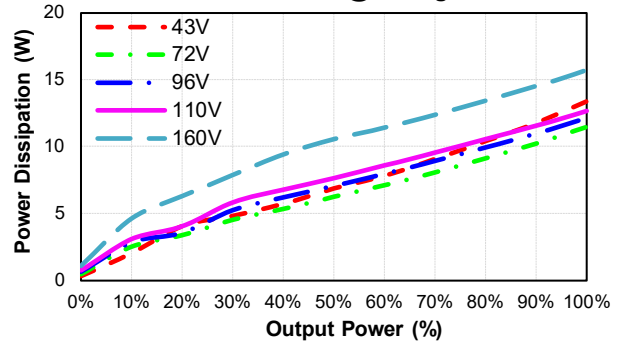

CQB100W-110S28-CMFC
Eff Vs Io @25 Deg. C

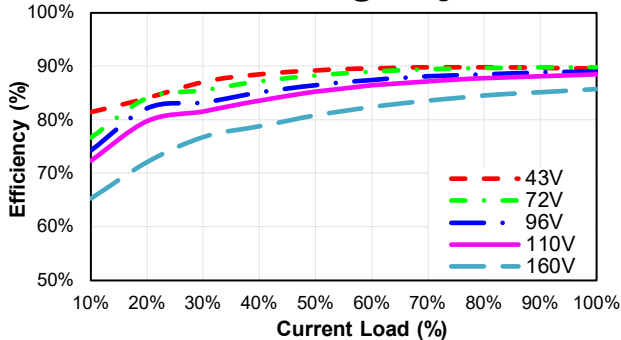


CQB100W-110S28-CMFC
Pd Vs Po @25 Deg. C

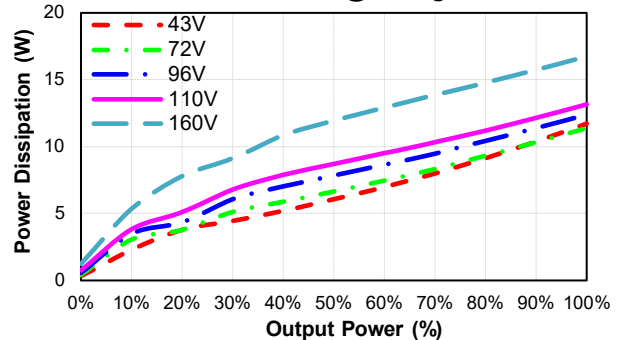




CQB100W-110S CMFC(D) Series

CQB100W-110S48-CMFC
Eff Vs Io @25 Deg. C

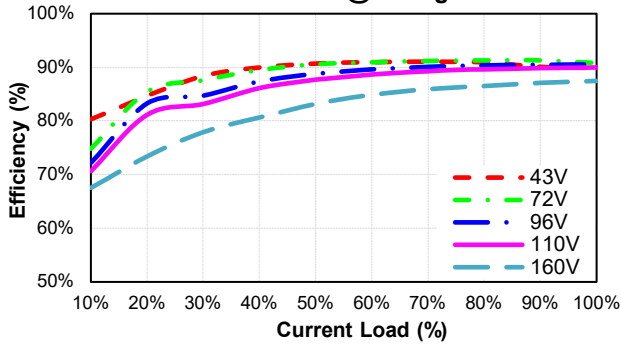



CQB100W-110S48-CMFC
Pd Vs Po @25 Deg. C

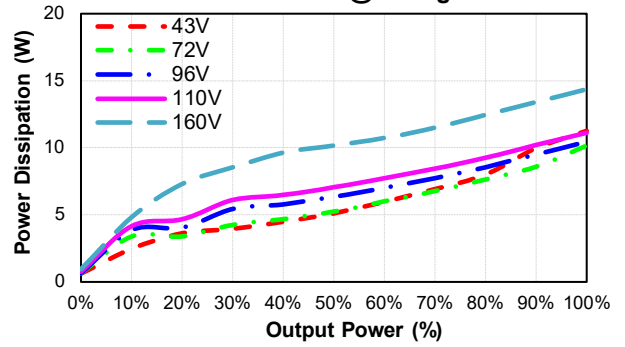



CQB100W-110S CMFC(D) Series

MECHANICAL SPECIFICATION

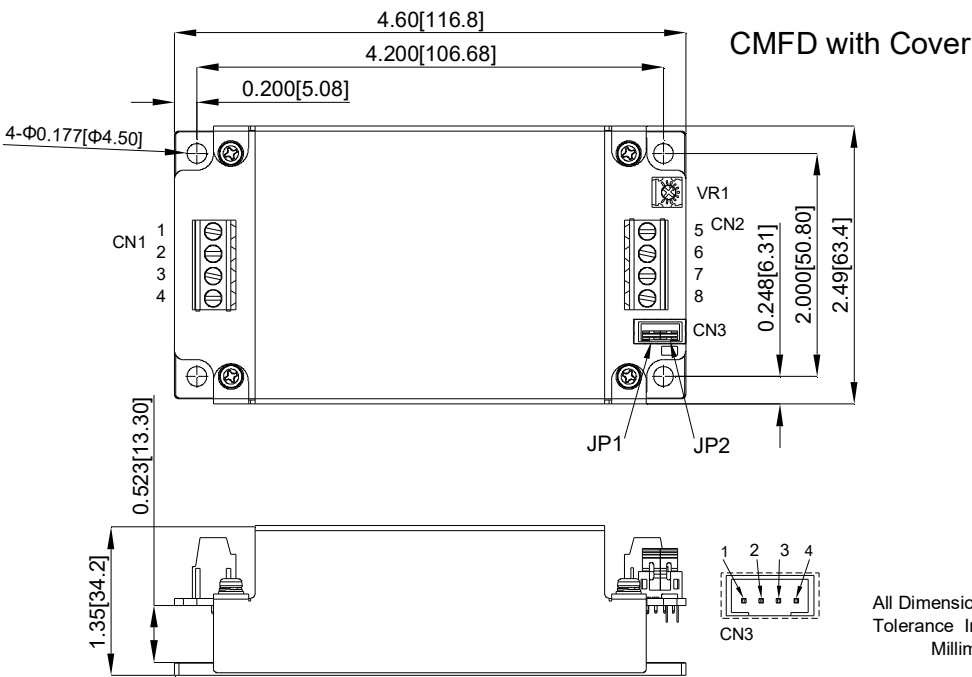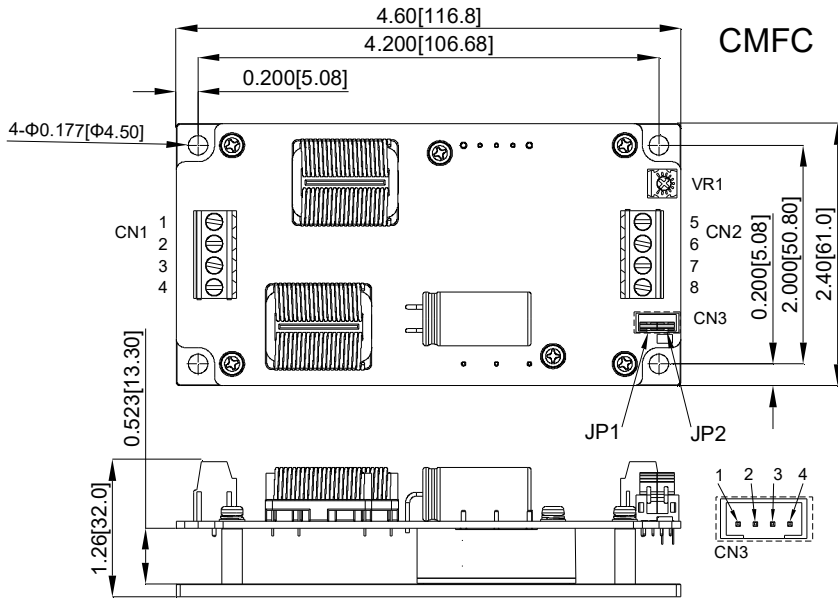

CN1&CN2
PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | +V Input |
| 2 | -V Input |
| 3 | Remote |
| 4 | Case |
| 5 | +V Output |
| 6 | +V Output |
| 7 | -V Output |
| 8 | -V Output |

CN3
PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | -V Output |
| 2 | -Sense |
| 3 | +Sense |
| 4 | +V Output |


*JP1:Short PIN1 & PIN2
*JP2:Short PIN3 & PIN4

All Dimensions In Inches (mm)
Tolerance Inches: X.XX=±0.02, X.XXX=±0.010
Millimeters: X.X=±0.5, X.XX=±0.25





CQB100W-110S CMFC(D) Series


MECHANICAL SPECIFICATION

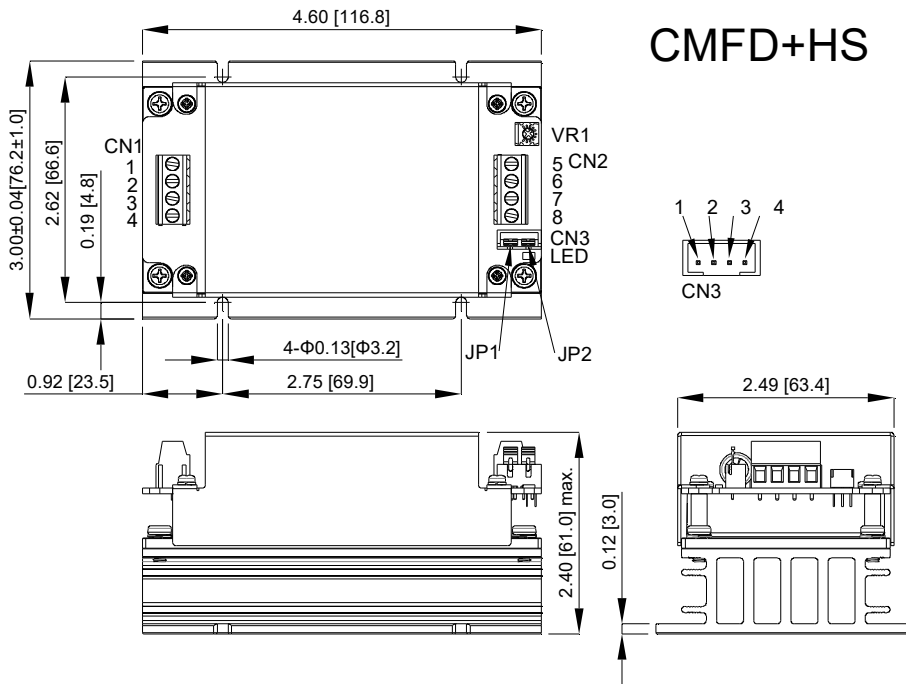

CMFD+HS

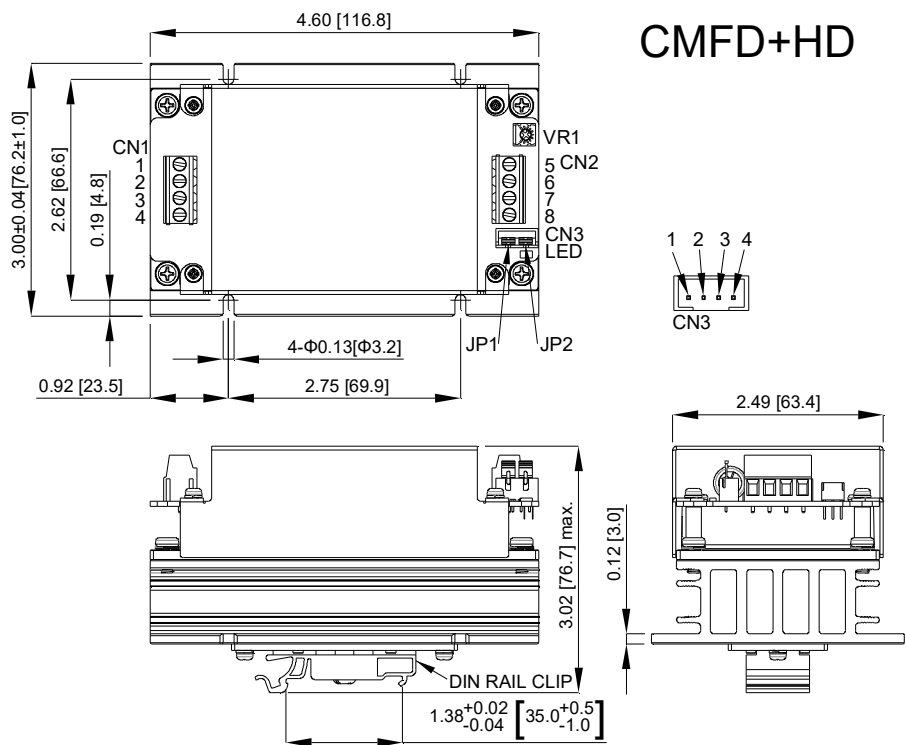

CMFD+HD



CN1 & CN2 PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | +V Input |
| 2 | -V Input |
| 3 | Remote |
| 4 | Case |
| 5 | +V Output |
| 6 | +V Output |
| 7 | -V Output |
| 8 | -V Output |

CN3 PIN CONNECTION

| PIN | Function |
|-----|-----------|
| 1 | -V Output |
| 2 | -Sense |
| 3 | +Sense |
| 4 | +V Output |

*JP1: Short PIN1 & PIN2
*JP2: Short PIN3 & PIN4

All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
Millimeters: x.x=±0.5, x.xx=±0.25

CINCON Electronics Co. Ltd.
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web: www.cincon.com

Authorised, valued-added distributor

Australia & New Zealand



Powerbox Australia Pty Ltd

Sydney Head Office
4 Beaumont Road,
Mt Kuring-Gai, NSW 2080
Australia



1800 251 380



sales@powerbox.com.au



powerbox.com.au

Powerbox Pacific Ltd

New Zealand Sales Office
1a Henry Rose Place,
Albany, Auckland
New Zealand 0632



09 4158 320



sales@powerbox.co.nz



powerbox.co.nz