



LFM200S SERIES 200 WATT AC-DC POWER SUPPLY WITH PFC

Features

- Universal Input Range 85~264Vac
- High Efficiency up to 94%
- Class I
- 25.4mm Low Profile Package
- No Load Input Power Consumption<0.3W
- 48V, 54V No Load Input Power Consumption<0.4W
- Approval IEC/EN/UL 62368-1 Ed 3.0
- Approval EN 55032 and CISPR/FCC Class B
- Meets IEC/EN 60335-1
- Operating Altitude 5000m
- Continuous Short Circuit Protection
- Over Voltage Protection
- Over Temperature Protection
- High Power Density 32.89W/Inches³
- Active PFC Function
- Over Voltage Category OVC II & OVC III



MODEL NUMBER	OUTPUT VOLTAGE	OUTPUT CURRENT			RIPPLE & NOISE NOTE1	VOLTAGE ACCURACY NOTE2	VOLTAGE ADJ. RANGE	LINE REGULATION NOTE3	LOAD REGULATION NOTE4	% EFF. (Typ.) NOTE5
		With Fan NOTE6	With Conduction Cooling NOTE7							
			Baseplate	Cover						
LFM200S120	12 V	16.67 A	10.83 A	14.17 A	150 mV	±1%	11.4-12.6 V	±0.2%	±0.5%	92%
LFM200S150	15 V	13.33 A	8.66 A	11.33 A	150 mV	±1%	14.25-15.75 V	±0.2%	±0.5%	92%
LFM200S240	24 V	8.33 A	5.41 A	7.08 A	200 mV	±1%	22.8-25.2 V	±0.2%	±0.5%	94%
LFM200S280	28 V	7.14 A	4.64 A	6.07 A	200 mV	±1%	26.6-29.4 V	±0.2%	±0.5%	93%
LFM200S300	30 V	6.66 A	4.33 A	5.67 A	200 mV	±1%	28.5-31.5 V	±0.2%	±0.5%	93%
LFM200S360	36 V	5.55 A	3.61 A	4.72 A	200 mV	±1%	34.2-37.8 V	±0.2%	±0.5%	94%
LFM200S480	48 V	4.16 A	2.71 A	3.54 A	200 mV	±1%	45.6-50.4 V	±0.2%	±0.5%	94%
LFM200S540	54 V	3.7 A	2.41 A	3.15 A	200 mV	±1%	51.3-56.7 V	±0.2%	±0.5%	93%

Note:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for ripple & noise measuring @20MHz BW.
2. Voltage accuracy is set at full load.
3. Line regulation is measured from 100Vac to 240Vac with full load.
4. Load regulation is measured from 10% to 100% full load.
5. Typical efficiency at 230 Vac and full load at 25°C.
6. Forced air convection with 14CFM above 110Vac.
7. With addition cooling conduction plate, 17.78 by 17.78 cm with min. 0.2 cm thick, as below.



LFM200S Series

PART NUMBER

Series	Number of Outputs	Nominal Output Voltage	Type	Mounting Inserts
LFM200	O	XXX	X	-YZ
LFM200	S : Single	120 : 12V 150 : 15V 240 : 24V 280 : 28V 300 : 30V 360 : 36V 480 : 48V 540 : 54V	B : With Baseplate C : With Cover	Blank : Through Hole C0 : Threaded Hole

Part Number Example:

LFM200S120C-C0: With Cover 200W, Single 12Vdc Output, Threaded Hole

LFM200S240B: With Baseplate 200W, Single 24Vdc Output, Through Hole



LFM200S Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Safety approvals only to the AC input	All	85		264	V _{ac}
				115		370
Operating Temperature	See derating curve	All	-40		80	°C
Operating Case Temperature	At the center of base plate (T _c = Case temperature)	All	-40		90	°C
Storage Temperature		All	-40		90	°C
Operating Altitude	IEC/EN/UL 62368-1 OVC II IEC/EN/UL 62368-1 OVC III	All			5000	m
					2000	

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Voltage Range		All	100		240	V _{ac}
Input Frequency Range		All	47		63	Hz
Maximum Input Current	100% Load, V _{in} =100V _{ac}	All			3.15	A
Leakage Current	Contact leakage current	All			100	uA
	Earth leakage current				300	
Inrush Current	V _{in} =240V _{ac} , Cold Start @25°C	All			85	A
Power Factor	230V _{ac} @ Full load	All	0.96	0.98		

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Set Point	V _{in} =Nominal V _{in} , I _o =I _o max., T _c =25°C	LFM200S120	11.88	12	12.12	V _{dc}
		LFM200S150	14.85	15	15.15	
		LFM200S240	23.76	24	24.24	
		LFM200S280	27.72	28	28.28	
		LFM200S300	29.7	30	30.3	
		LFM200S360	35.64	36	36.36	
		LFM200S480	47.52	48	48.48	
		LFM200S540	53.46	54	54.54	
Operating Output Current Range	V _{in} =85V _{ac} ~264V _{ac} , see derating curve	LFM200S120	0		16.67	A
		LFM200S150	0		13.33	
		LFM200S240	0		8.33	
		LFM200S280	0		7.14	
		LFM200S300	0		6.66	
		LFM200S360	0		5.55	
		LFM200S480	0		4.16	
		LFM200S540	0		3.7	
Holdup Time	V _{in} =115V _{ac}	All	10	12		ms
Output Voltage Regulation						
Load Regulation	10% Load to full load	All			±0.5	%
Line Regulation	V _{in} =High line to low line	All			±0.2	%
Output Voltage Adjustment	P _o ≤ max. rated power, I _o ≤ I _o max.	All	-5		+5	%



LFM200S Series

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Over Voltage Protection	Latch off (AC recycle to reset)	LFM200S120			16	V _{dc}
		LFM200S150			20	
		LFM200S240			32	
		LFM200S280			35	
		LFM200S300			35	
		LFM200S360			45	
		LFM200S480			55	
		LFM200S540			63	
Over Current Protection	Auto recovery (output is rated load)	All	120	145	165	%
Short Circuit Protection	Auto recovery	All				
Over Temperature Protection	Auto recovery	All				
Output Ripple and Noise	1. Add a 0.1uF ceramic capacitor and a 10uF aluminum electrolytic capacitor to output 2. Oscilloscope is 20MHz band width. 3. Ambient Temperature=25°C	LFM200S120			150	mV
		LFM200S150			150	
		LFM200S240			200	
		LFM200S280			200	
		LFM200S300			200	
		LFM200S360			200	
		LFM200S480			200	
		LFM200S540			200	
Load Capacitance	1. V _{in} =115V _{ac} and 230V _{ac} 2. Output is max. load 3. Ambient temperature=25°C	LFM200S120			6800	uF
		LFM200S150			5360	
		LFM200S240			3440	
		LFM200S280			3440	
		LFM200S300			3220	
		LFM200S360			2680	
		LFM200S480			2000	
		LFM200S540			1560	
Efficiency	1. Input Voltage is 230Vac 2. Output is rated load 3. Ambient temperature=25°C	LFM200S120		92		%
		LFM200S150		92		
		LFM200S240		94		
		LFM200S280		93		
		LFM200S300		93		
		LFM200S360		94		
		LFM200S480		94		
		LFM200S540		93		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input to Output	1 Minute (without dielectric breakdown)	All			4250	V _{ac}
Input to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V _{ac}
Output to Earth (Ground)	1 Minute (without dielectric breakdown)	All			2000	V _{ac}
Isolation Resistance	Input to output	All	100			MΩ

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency		15V		130		kHz
		Others		110		



LFM200S Series

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I _o =100%; T _a =25°C per MIL-HDBK-217F I _o =100%; T _a =25°C per Telcordia SR332	All	450 2800			k hours
Life Time (Detail refer to Application Note)	Conduction cooling @75% Load, 40°C Fan cooling @75% Load, 40°C	All		110 179		k hours
Humidity	Non-condensing	All			93	% RH
Shock	Meet MIL-STD-810F Table 516.5, Table 516.5-I 10ms, each axis 3 times(±X、±Y、±Z axis)	All		75		g
Vibration	Meet MIL-STD-810F Table 514.5C-VIII, 15~2000Hz, X、Y、Z axis, 1 hour (each axis), Total 3 hrs.	All		4		g
Weight	Baseplate versions Covered versions	LFM200SXXXB LFM200SXXXC		130 220		grams
Dimensions	Baseplate versions Covered versions	LFM200SXXXB LFM200SXXXC	3.04x2.00x1.00 Inches (77.2x50.8x25.4 mm) 3.09x2.28x1.00 Inches (78.6x57.9x25.4 mm)			
Safety	Class I, IEC/EN/UL 62368-1					Ed. 3.0
EMC Emission	EN 55032, EN 61000-6-4, EN 61204-3, EN 61000-3-2, EN 61000-3-3, 47 CFR FCC Part 15					
Conducted Disturbance	EN 55032, 47 CFR FCC Part 15					Class B
Radiated Disturbance	EN 55032, 47 CFR FCC Part 15					Class B
Harmonic Current Emissions	EN 61000-3-2					Class A, C, D
Voltage Fluctuations & Flicker	EN 61000-3-3					Criterion A
EMC Immunity	EN 55035, EN 61000-6-2, EN 61204-3					
Electrostatic Discharge (ESD)	IEC 61000-4-2, Level 3: Air Discharge: ±8kV, Level 2: Contact Discharge: ±4kV					Criterion A
Radio-Frequency, Continuous Radiated Disturbance	IEC 61000-4-3, Level 3: 80~2700MHz, 10V/m					Criterion A
Electrical Fast Transient (EFT)	IEC 61000-4-4, Level 3: ±2kV					Criterion A
Surge	IEC 61000-4-5, Level 4: L-N: ±2kV, L-E (Ground): ±4kV					Criterion A
Conducted Disturbances, Induced by RF Fields	IEC 61000-4-6, Level 3: 0.15~80MHz, 10V					Criterion A
Power Frequency Magnetic Field	IEC 61000-4-8, Level 4: 30A/m					Criterion A
Voltage Dips	IEC/EN 61000-4-11, Dip: 30% Reduction IEC/EN 61000-4-11, Dip >95% Reduction					Criterion A
Voltage Interruptions	IEC/EN 61000-4-11, >95% Reduction					Criterion B
Application Note Link						LFM200S Series App Notes




LFM200S Series


CHARACTERISTIC CURVE

Power Derating Curve


Output Power vs Ambient Temperature

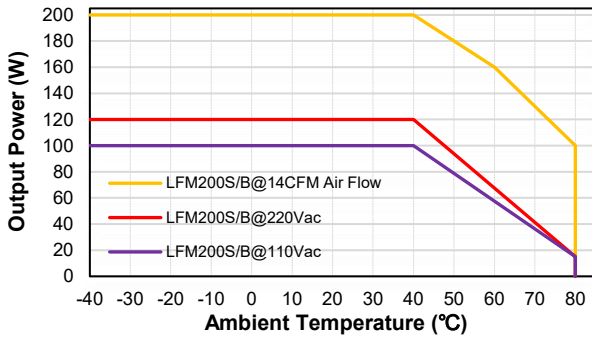


Output Power & Input Voltage

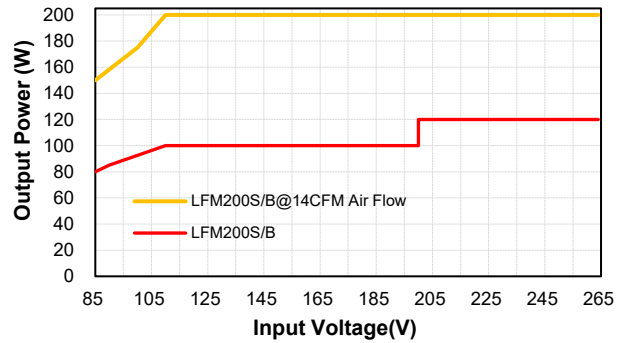

Output Power vs Ambient Temperature

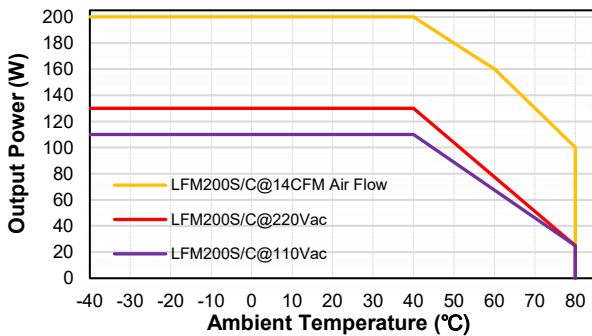


Output Power & Input Voltage

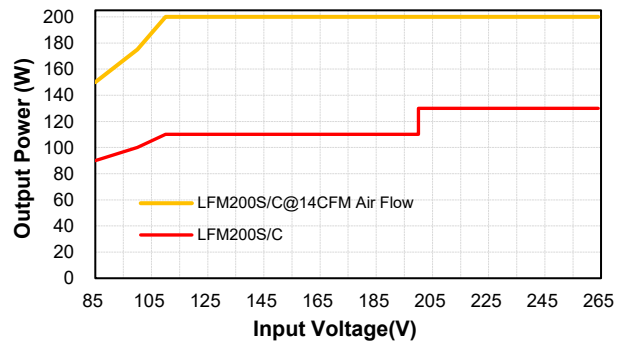


Conduction Convection with External Baseplate (17.78cmx17.78cmx0.2cm)

Output Power vs Ambient Temperature

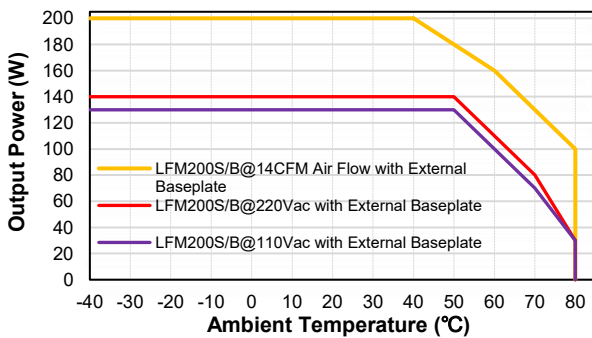


Output Power & Input Voltage

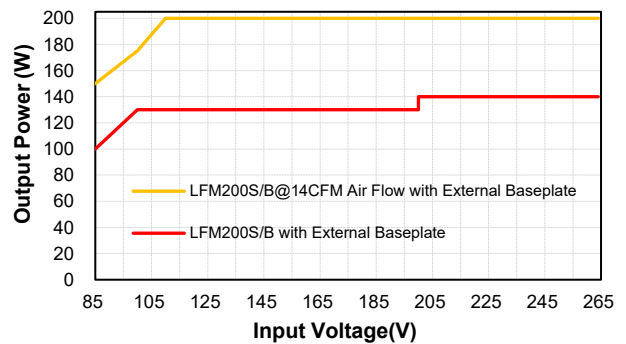




LFM200S Series


Output Power vs Ambient Temperature

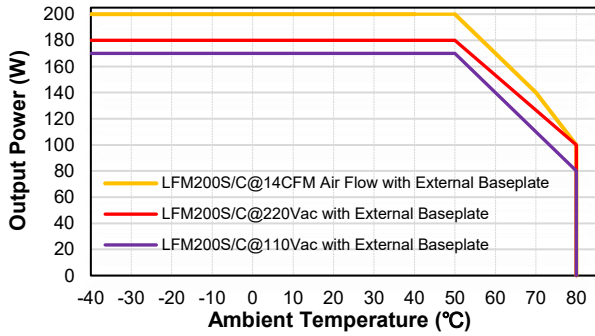

Output Power & Input Voltage

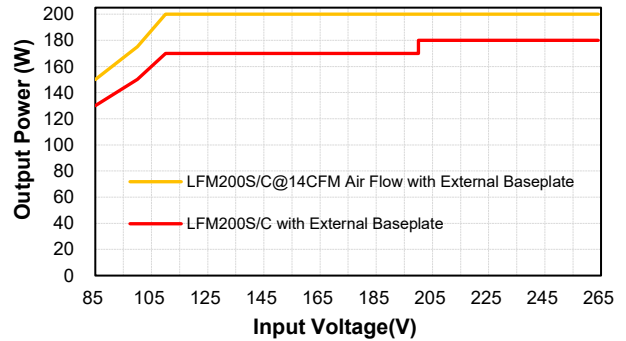


Output Power vs Case Temperature (T_c)

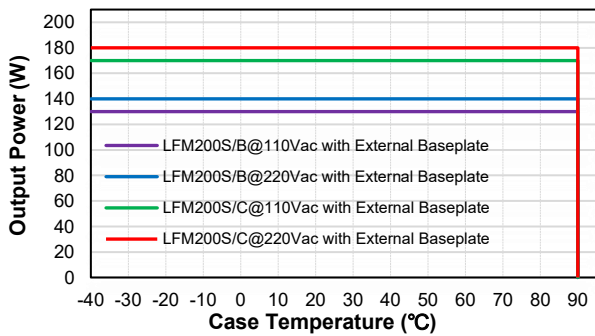


Performance Data


LFM200S120 (Eff Vs Io)

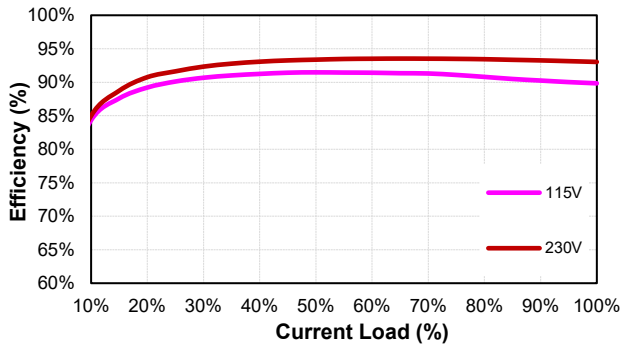


LFM200S150 (Eff Vs Io)

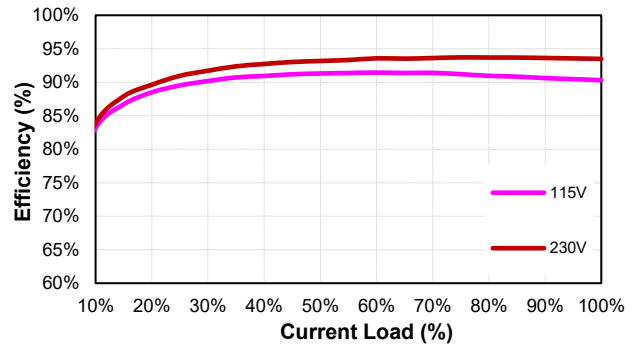

LFM200S240 (Eff Vs Io)

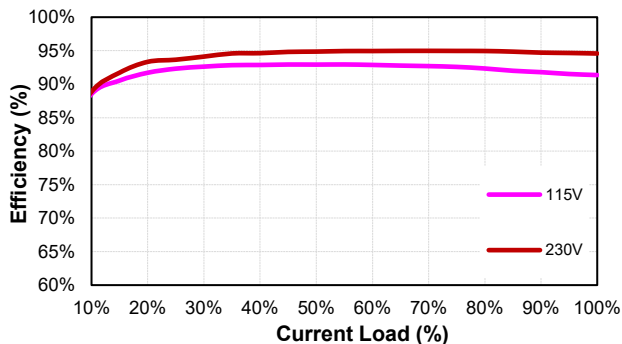


LFM200S280 (Eff Vs Io)

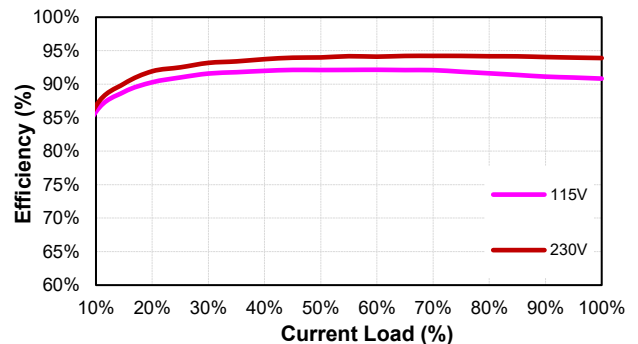




LFM200S Series


LFM200S300 (Eff Vs Io)

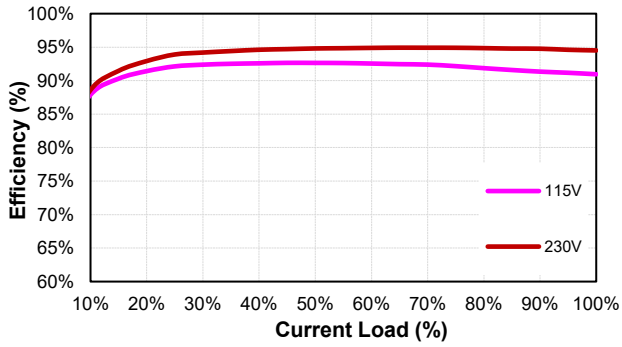


LFM200S360 (Eff Vs Io)

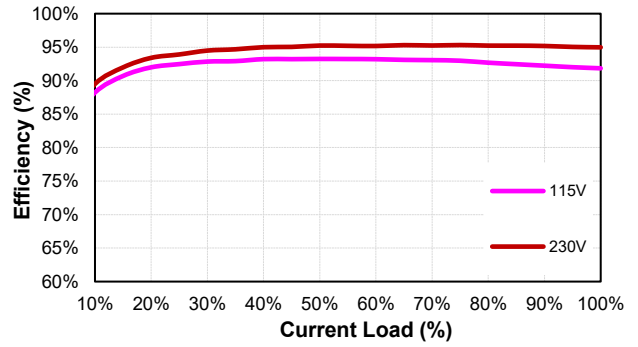

LFM200S480 (Eff Vs Io)

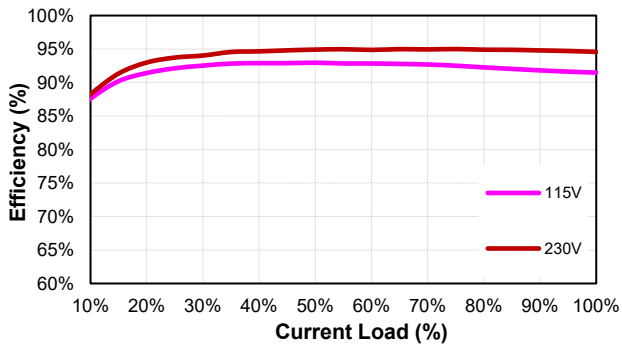



LFM200S540 (Eff Vs Io)

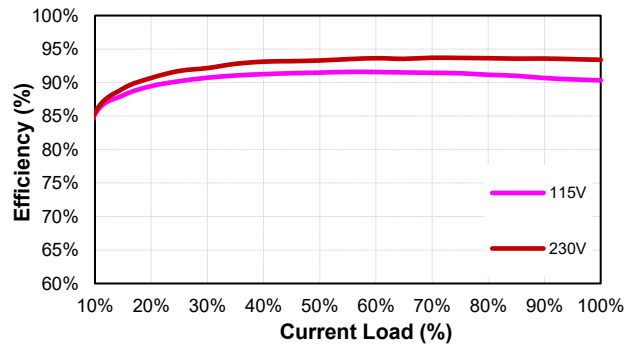



LFM200S Series

MECHANICAL SPECIFICATION

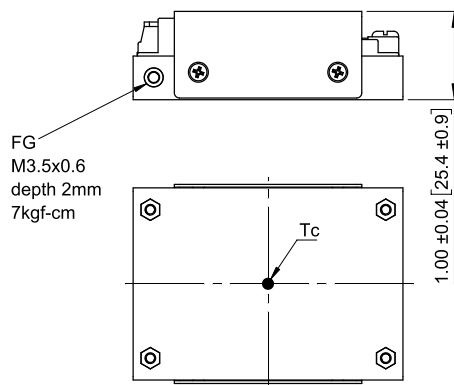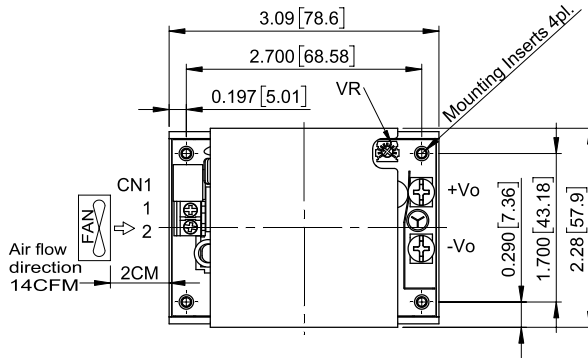

LFM200SXXXC LFM200SXXXC-C0

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22



Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	∅3.2 Through depth 10.5mm
-C0	M3x0.5 Threaded depth 10.5mm

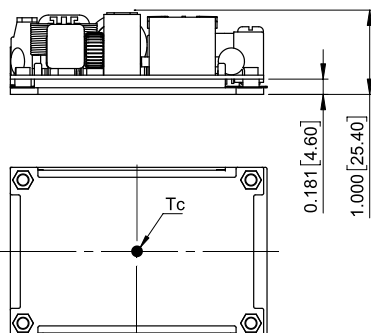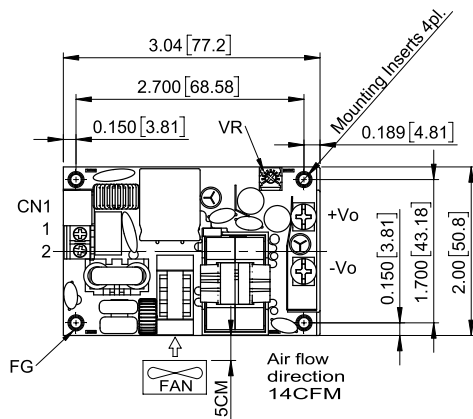

LFM200SXXXB LFM200SXXXB-C0

All Dimensions in Inches[mm]
 Tolerance Inches: x.xx=±0.03, x.xxx=±0.020
 Millimeters: x.x=±0.7, x.xx=±0.50

AC Input Connector(CN1):ECE ETB22

Pin	Function	Mating Wire Range
1	ACL	14~18 AWG
2	ACN	

DC Output Connector:KANG YANG PCB-58M4

Function	The screw locked torque
+Vo	M4 7kgf-cm
-Vo	

Mounting Inserts

Series	Option
Blank	∅3.2 Through depth 8.1mm
-C0	M3x0.5 Threaded depth 8.1mm

CINCON Electronics Co. Ltd.
 Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web: www.cincon.com

Authorised, valued-added distributor

Australia & New Zealand



Powerbox Australia Pty Ltd

Sydney Head Office
4 Beaumont Road,
Mt Kuring-Gai, NSW 2080
Australia



1800 251 380



sales@powerbox.com.au



powerbox.com.au

Powerbox Pacific Ltd

New Zealand Sales Office
1a Henry Rose Place,
Albany, Auckland
New Zealand 0632



09 4158 320



sales@powerbox.co.nz



powerbox.co.nz